

WRAP MACHINE

Takakita

オートラップマシン・リモコンラップマシン
・ミニラップマシン

新製品
NEWS

WM Series

Wrapping For Hay, Rice and Wheat Straw



WM1121



WM1001RW

WM1272A

ミニラップマシン Mini Wrap Machine For Hay, Rice and Wheat Straw

WM-5 1 1 E (Gasoline Engine)

Energy-saving design that automatically reduces engine speed when wrapping is finished!



WM-5 1 1 M (Motor Engine)

100V power supply and turn it on!



● The low table makes it easy to load and unload round bales.

● Table rotation speed increased for higher efficiency



Easy film setting!



Carrying handles and large-diameter tires make carrying easy!



Anti-vibration rubber to absorb vibration!

Specifications

Model Name	Machine Size (mm) L x W x H	Weight (kg)	Suitable Tractor (kW [HP])	Bale Size (cm)	Bale Weight (kg)	Linkage With Tractor	Operation	Film System	Film Width (mm)
WM1121	1,890x1,680x2,080	485	22.1~44.1 {30~59}	φ85~115 x85~100	Max. 600	3P Linkage Category I / II	Auto	Double Single	500 750
WM1062A	2,900x1,800x1,800 (At Work Width 2,300)	680	14.7~33.1 {20~44}	φ90~100 x85~100	Max. 350	2P Drawbar Category I	Auto	Single	500
WM1072A		730						Double	
WM1262A	3,150x1,800x2,270 (At Work Width 2,300)	960	18.4~51.5 {25~69}	φ90~120 x85~120	Max. 700			Single	
WM1272A		950	Double						
WM1001R	3,000x2,050x1,800	530	14.7~51.5 {20~69}	φ85~120 x85~120	Max. 800	Swing Drawbar	Remote Controller	Single	
WM1001RW		560		φ100~120 x85~120				Double	

Model Name	Machine Size (mm) L x W x H	Weight (kg)	Driving Force	Output (kW [HP])	Bale Size (cm)	Bale Weight (kg)	Film System	Film Width (mm)
WM-511E	1,750x900x840	69	Gasoline Engine	1.6{2.1}	φ50x 60~73	17kg UP	Single	250
WM-511M		65	Single-Phase 100V Motor	200W				

*Takakita original film is recommended. Use of other films may result in breakage or other problems.

※仕様・写真は、改良のため予告なく変更することがあります。



安全作業
農業機械は取り扱い説明書をよく読み正しい操作を心がけましょう。
農業機械の使用前後には点検・整備を心がけましょう。

QRコードからもタカキタのホームページにアクセスできます。




製品のご相談は...

株式会社 タカキタ

本社工場/〒518-0441 三重県名張市夏見2828番地 TEL.0595(63)3111(代) FAX.0595(64)0857
札幌工場/〒007-0882 札幌市東区北丘珠2条3丁目1番20号 TEL.011(781)1111(代) FAX.011(781)1113
営業所/札幌・豊富・北見・中標津・帯広・東北・南東北・関東・関西・中国・九州・南九州
URL: <http://www.takakita-net.co.jp>

オートラップマシン [3P Linkage Type]

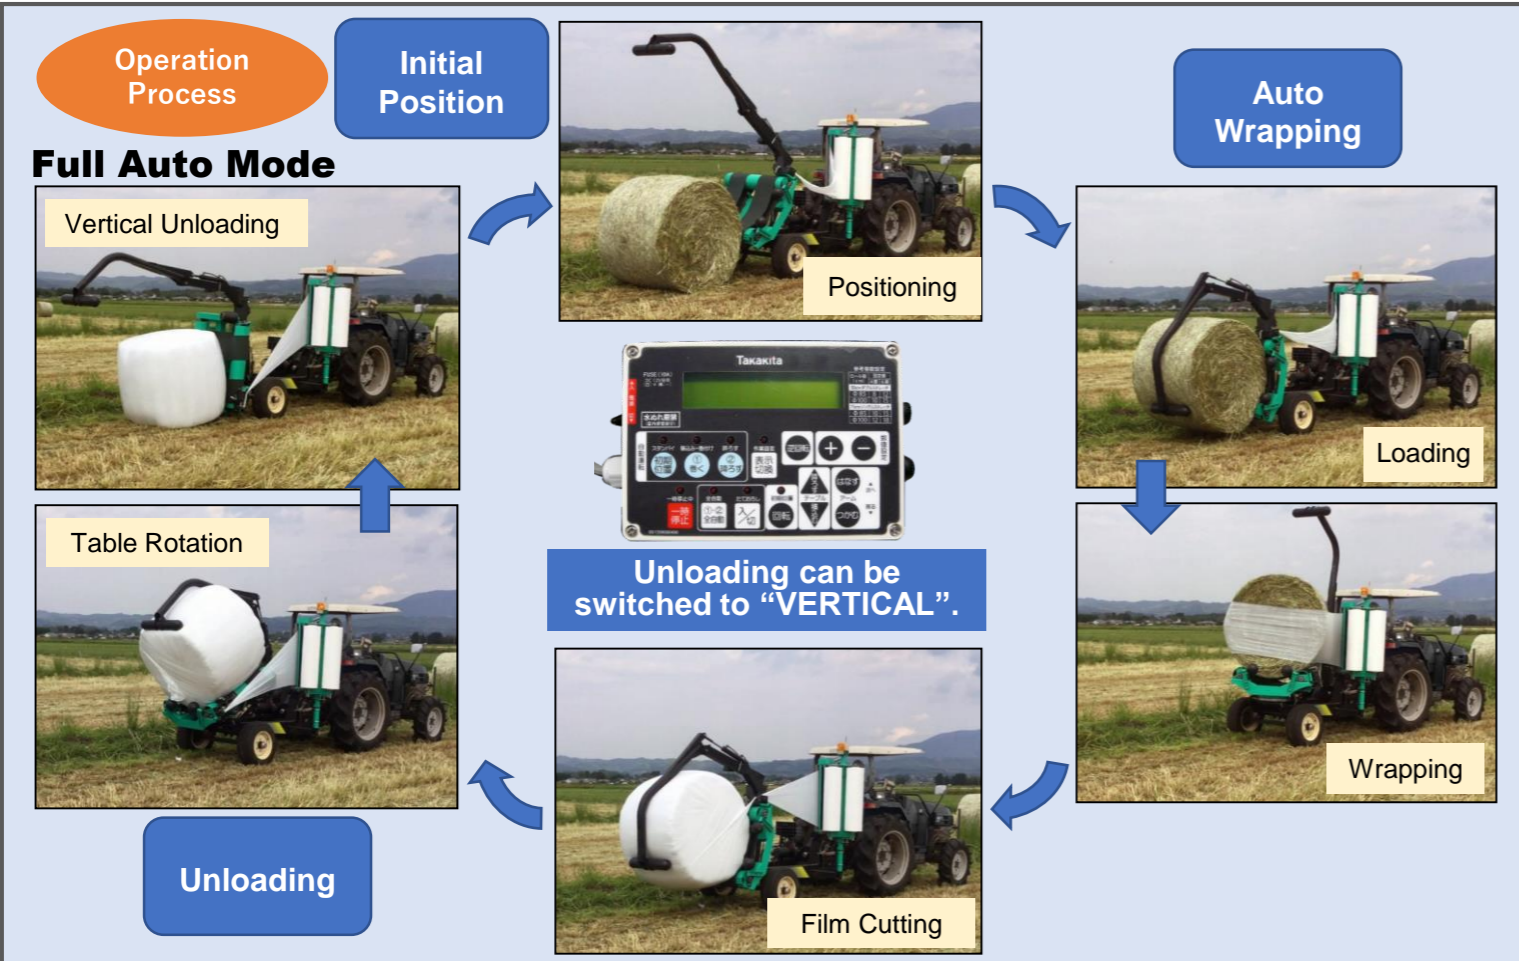

Film Changer

Double Wrapping:
Available for 500mm
X 2 rolls X 2 sets

Single Wrapping:
Available for 750mm
X 4 rolls

Large Caster

The large casters with a forward/backward travel angle of ± 30 degrees provide excellent traveling performance on soft land.

*Tire Size
 $\phi 546 \times W 216\text{mm}$

Emergency Manual Valve Function

Manual operation can be performed by the hydraulic lever in an emergency when an automatic operation is not possible due to electrical problems.

Grab/Release
Load/Unload
Forward/reverse


Remote Controller WM1120-RC

Capable of wrapping start, unloading, and primary stop operations. A film-out sensor automatically stops the machine when the film runs out.
*Unloading horizontally is recommended in stationary operation.



Back Monitor WM1120-BM

The back monitor takes video of the situation behind the machine

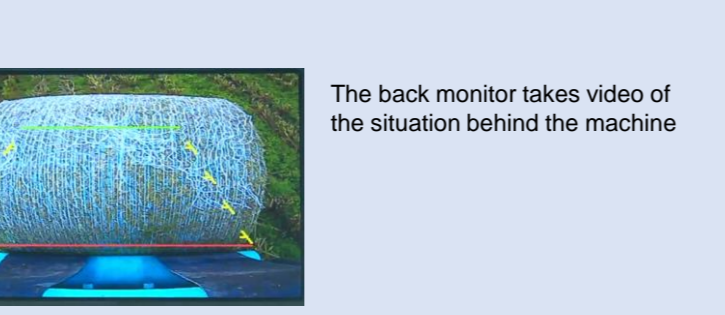

[Drawbar Type]



Side loading system for easy positioning!

The position of bales can be seen from the tractor driver's seat to the right rear. Bales can be loaded without the need to watch turning around to the rear.

2P Linkage can also be used with low HP tractors

Film Width 500mm

WM1062A
Bale Size $\phi 90 \sim 100 \times 85 \sim 100\text{cm}$
Tractor HP 14.7~33.1kW{20~44HS}

WM1262A
Bale Size $\phi 90 \sim 120 \times 85 \sim 120\text{cm}$
Tractor HP 18.4~51.5kW{25~69HP}

Arm/Table Operation

Wrapping Num. **Auto Operation**

Vertical Unloading Option WM1062A-TO
WM1262A-TO

The thick film layer can ground the bottom surface and prevent holes caused by protrusions

Double Wrapping Attachment Option WM1062-W
WM1262-W

Reduces film wrapping time.

リモコンラップマシン Remote Control Wrap Machine



An automatic stop device is activated, when a film runs out in the middle of wrapping

Single Wrapping
WM1001R
Bale Size $\phi 85 \sim 120 \times 85 \sim 120\text{cm}$
Tractor HP 14.7~51.5kW{20~69HP}

Double Wrapping
WM1001RW
Bale Size $\phi 100 \sim 120 \times 85 \sim 120\text{cm}$
Tractor HP 14.7~51.5kW{20~69HP}

Film Width 500mm

The table is low enough to reduce the impact of dropping during unloading and This reduces the deformation of the bale and damage to the film.

OPTIONS